


## Fitting the GARDA quality

When seaming, it is important to cut the carpet along the warp chain. The thin warp chain yarn must be intact on both sides of the seam. Otherwise the carpet will fray. If necessary you could heat-treat the seam with a vinyl heat welding gun - very carefully, as the heat might result in a minor discoloration of the carpet.

When heat-treating the seam, the vinyl heat welding gun should be held in a way so that the rays of heat point from the back of the carpet towards the pile to avoid melting the pile surface.

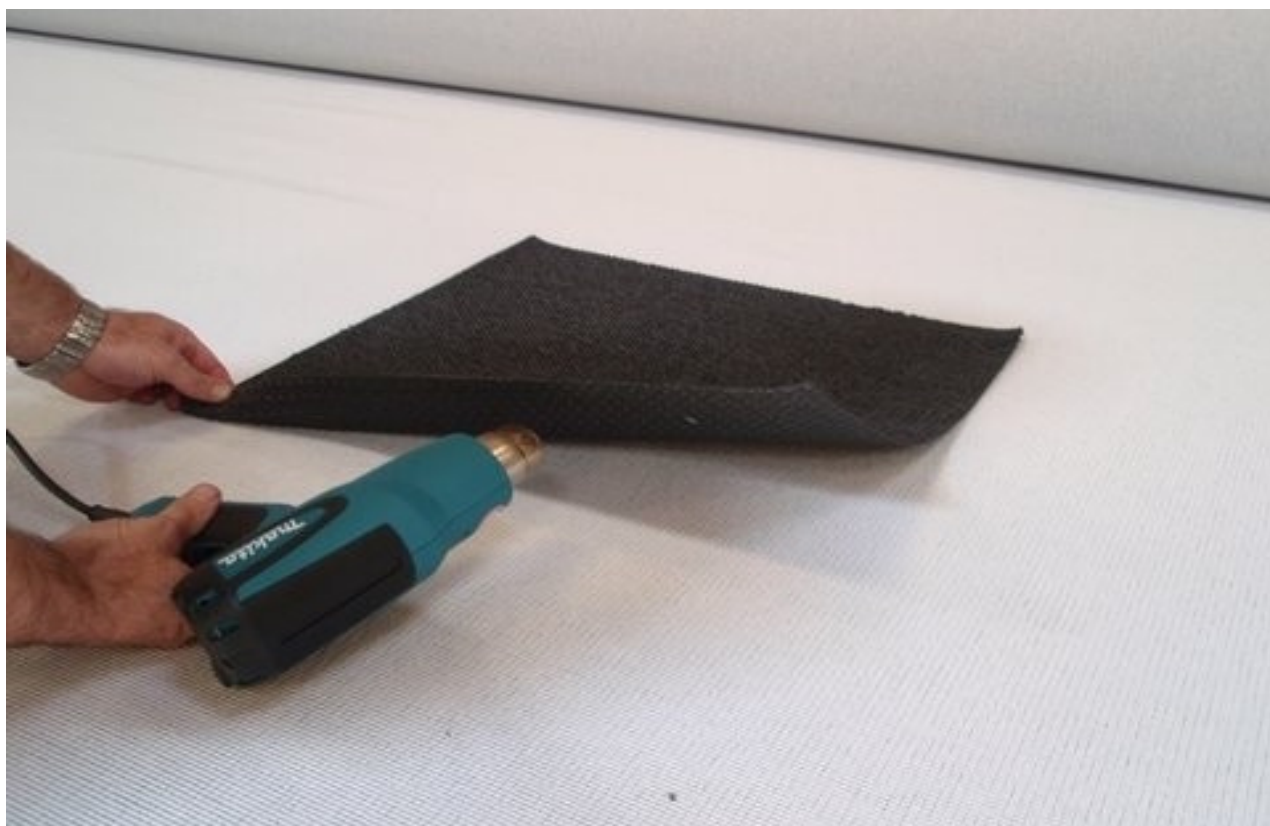

As shown on the picture you can use vinyl heat welding guns, for instance the Makita or Bosch types. This is an article which almost every carpet fitter is supposed to have, or which can be bought all over Europe.

You could also overlock the carpet. But you must be 100% sure that the yarns used for this overlocking are suitable for outdoor use. For this purpose the yarns must be resistant to UV radiation (for instance Polypropylene with additional UV stabilization properties).

We recommend when laying more than 20 m<sup>2</sup> outdoors that the carpet should be glued around the edges (minimum 20 cm). For this purpose please use a suitable acrylic adhesive for outdoor usage.

## BENTZON CARPETS ApS